

SETUP SHEET

FOR THE RC10L3 Oval KIT

2E TEAM ASSOCIATED


DATE: _____
 DRIVER: _____
 TRACK LOCATION: _____
 EVENT: _____

FRONT SUSPENSION

UPPER ARM MOUNT: 0°



CASTER SHIM POSITION:
 SPLIT RF, FRONT LF



STEERING BLOCK: inline



CAMBER, left .5 DEG. right -2.5 DEG

TOE-IN: 0 DEG TOE-OUT: 1 DEG

FRONT SPRINGS


SPRINGS: .020

shim qty, thickness:

shim qty, thickness:

shim qty, thickness:

front ride height spacers: 2 0 DEG



REAR SUSPENSION

AXLE HEIGHT ADJUSTER:

2-down



T-BAR THICKNESS: STD

SHOCKS

CENTER SHOCK: STD

OIL: ASC WT: 40

SPRING: SILVER PISTON: #1

PRELOAD SPACERS: NONE

SIDE SHOCKS: STD VCS

OIL: ASC WT: 40

SPRING: ASC RED

WHEELS & TIRES

WHEELS & TIRES	FRONT	REAR
TIRE TYPE	PURPLE	PURPLE
WHEELS	JACO	JACO
TIRE DIA	2.25	2.25
STAGGER	NONE	NONE
CARWIDTH	STOCK	STOCK

TWEAK SETTINGS:



SHADE IN AMOUNT
 OF TIRE TREATMENT

TIRE TREATMENT TYPE: PARAGONS GROUND EFFECTS

REAR AXLE: STD

OTHER

CHASSIS: STD


CAR BODY: ANDY'S TAURUS WING/SPOILER: THUNDER

MOTOR: 11 X 5 PINION: 27 SPUR GEAR: 116

BATTERIES: REEDY ZAPPERS

POD: offset

INDICATE BATTERY PACK PLACEMENT:

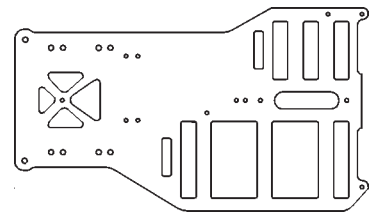

WHEELBASE: STD

OVERALL WEIGHT: STOCK

GENERAL

TRACK CONDITIONS:

asphalt
 flat
 track length: 375 FT
 high traction

RACE COMMENTS/FINISH:

CAR COMMENTS/HANDLING:

